


SPECIFICATION SHEET

SC-SD-XXXX Rectangular, 3-wire Floating Point Motorized Zone Control Dampers

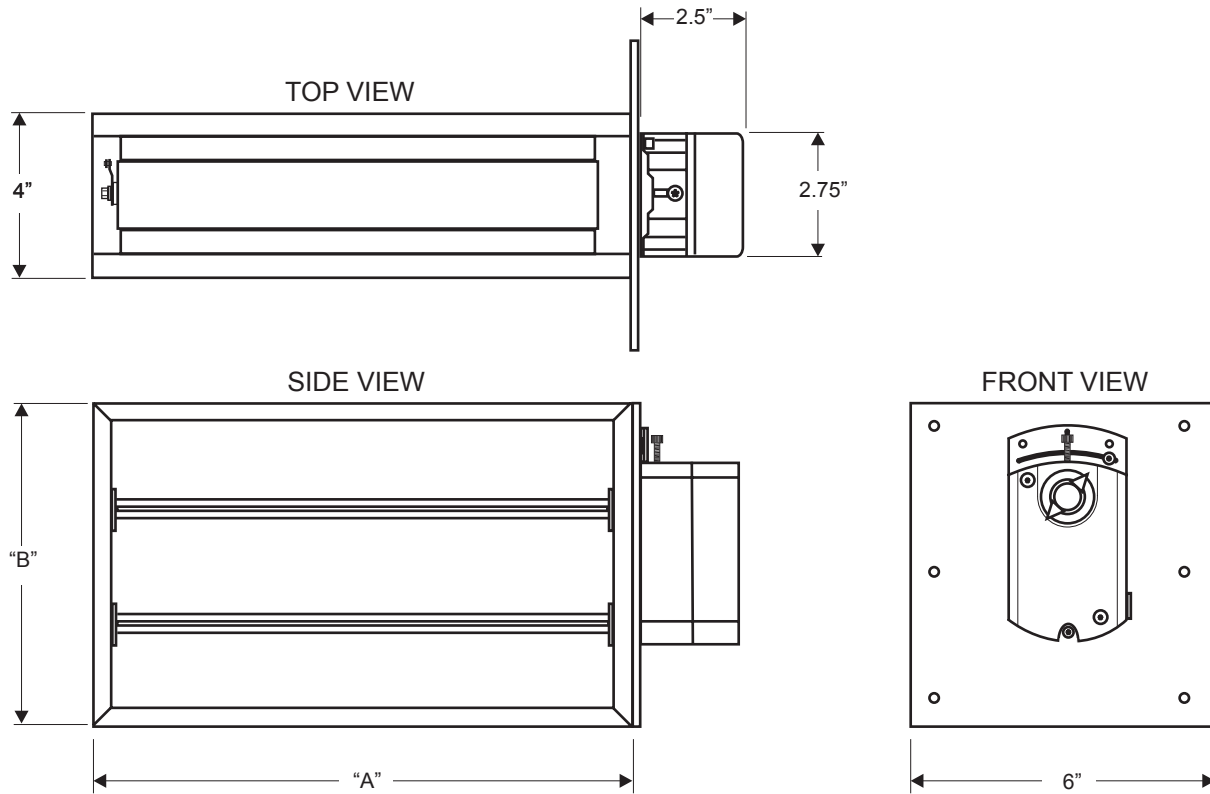

SPECIFICATIONS

DIMENSIONS:

Damper models SD-XXXX are sized width (A) by height (B) with actuator on the (B) dimension.
Bottom mount models SD-XXXX-BM are sized width (A) by height (B) with actuator on the (A) dimension.
Actual (A) and (B) dimensions are undercut 1/4".
Standard sizes range from 8" x 8" up to 36" x 24" in 2" increments.

APPLICATION:

Compatible for zone control and other HVAC applications with static pressures less than 1.0" w.c.

CONSTRUCTION:

- 1/16" extruded aluminum frame
- 1/16" extruded aluminum parallel blades
- 1/16" aluminum mounting flange
- Nylon bushings
- Minimum position adjustment

ELECTRICAL:

- 24 Volt, 2 VA, floating point
- 90 second timing
- 44 lb.-in.

Drawings are intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale.
Jackson Systems reserves the right to make product changes without notification or obligation.



5351 East Thompson Road, Suite 128, Indianapolis, IN 46237
Toll Free: 888.359.0365 Direct: 317.361.0830
www.specifiedcontrols.com