



SC-BAL-XX

Specification Sheet Round Electronic Balancing Damper

Used in air balancing applications

APPLICATION:

The SC-BAL-XX is a round, remote powered balancing damper designed to balance air flow in a HVAC system. The SC-BAL-XX is ideally suited for applications where balancing dampers are located in finished ceilings or simply difficult to access and adjust manually. A hand-held remote control positioner equipped with a 9 volt power supply (SC-BAL-C) operates the damper actuator via a plug-in RJ11 cable terminating at an optional wall box, round ceiling plate or diffuser connector.

FEATURES:


- No field power required
- Built-in dual RJ11 connectors on actuator
- Wide range of sizes

DAMPER SPECIFICATIONS:


Available Sizes:	4", 5", 6", 7", 8", 10", 12", 14", 16", 18"
Damper Shell:	20 gauge galvanized steel
Actuator Bracket:	18 gauge galvanized steel
Damper Blade:	24 gauge galvanized steel
Shaft:	1/2" solid aluminum
Body Length:	8"
Bushings:	Bronze Oilite
Gasket:	Low leakage
Leakage:	Class 2 - 10 cfm/ft ² @ 1" w.g. (3 cmm/m ² @ .25 kPa)
Maximum Static Pressure:	2" W.C.
Maximum System Velocity:	2,000 FPM
Actuator:	Factory mounted, 9 volt, gear driven, fail in place motor with dual RJ11 connectors
Warranty	One Year



SC-BAL-C
REMOTE CONTROL
POSITIONER

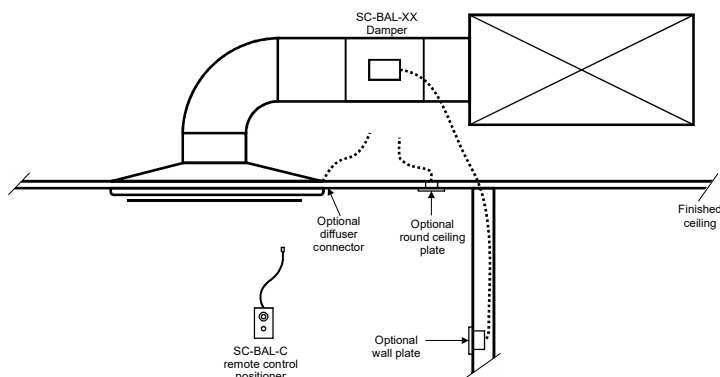

DAMPER SIZING CHART

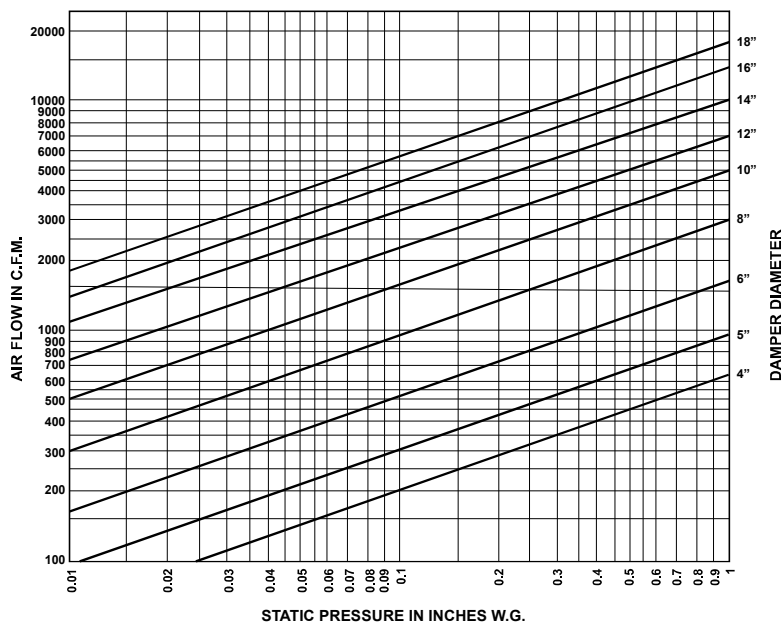

ACCESSORIES

SC-BAL-C REMOTE CONTROL POSITIONER

Hand-held remote control positioner equipped with 9 volt power supply. Operates the damper actuator via a RJ11 cable that plugs into a wall box, round ceiling plate or diffuser connector. Controller has a calibrated damper position dial and power activation button and battery status LED.



SC-BAL-C

SC-BAL-PORT

Feed-through in-line coupler modular jack. (6-position 6-conductor) Connects two modular cords; Pin 1 to Pin 1. Compatible with RJ11 jacks and plugs. Can also be used as a diffuser connector or with wall plates.



SC-BAL-PORT

SC-BAL-PORT-PARA

The SC-BAL-PORT-PARA must be used whenever paralleling SC-BAL-XX or SC-BAL-XXXX dampers together. A SC-BAL-W line cord would be plugged into the auxiliary port of the main actuator and into the SC-BAL-PORT-PARA. Another SC-BAL-W line cord would be plugged into the other end of the SC-BAL-PORT-PARA and into the next actuator. This provides synchronized positioning of both actuators. Up to four dampers can be wired in parallel.



SC-BAL-PORT-PARA

SC-BAL-RP ROUND RJ11 CEILING TILE ANCHORING SYSTEM

- Used to plug-in SC-BAL-C hand held remote control positioner for below ceiling adjustment of electronic balancing damper
- High impact injection molded components with feed-through, in-line RJ11 coupler included
- Twist and turn access cap protects and conceals RJ11 port
- Easy to install in existing ceiling tile
- Adjustable mounting tabs lock in place when securing to back of tile



SC-BAL-RP

SC-BAL-W SILVER SATIN LINE CORD

Made of the finest PVC material. Cords are RoHS approved and come with RJ11 connectors.

Lengths:

SC-BAL-W7 - 7'

SC-BAL-W14 - 14'

SC-BAL-W25 - 25'



SC-BAL-W

WHITE PLASTIC WALL PLATES (SC-BAL-PP)

Configured to fit single or standard double gang outlet box. Rugged and durable construction. Used with SC-BAL-PORT modular snap-in connectors. UL Listed




SC-BAL-PP1

SC-BAL-PP2

SC-BAL-PP3

SC-BAL-PP4

SC-BAL-PP6



SC-BAL-PP12



EXAMPLE OF
DOUBLE GANG
JUNCTION BOX
(BY OTHERS)

STAINLESS STEEL WALL PLATES (SC-BAL-SP)

Configured to fit standard single gang outlet box. Offers a flush face surface. Used with SC-BAL-PORT modular snap-in connectors.



SC-BAL-SP1

SC-BAL-SP2

SC-BAL-SP3


SC-BAL-SP4

SC-BAL-SP6

SUGGESTED SPECIFICATION:

Furnish and install as shown on plans or in accordance with schedules, remote control operated balancing dampers SC-BAL-XX round or SC-BAL-XXX rectangular as manufactured by Specified Controls, LLC, Indianapolis, IN 46237. (www.specifiedcontrols.com) Damper actuators shall be powered by a 9 volt battery operated remote control positioner (SC-BAL-C) that plugs into a RJ11 connector located on a ceiling plate, wall box or diffuser. Refer to accessory options as specified and available from Specified Controls, LLC.

**SPECIFIED
CONTROLS**



5351 East Thompson Road
Suite 128

Indianapolis, IN 46237

888.359.0365

www.specifiedcontrols.com

SC-08-1284-080422