


Submittal Sheet

JOB NAME _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
LOCATION _____

SC-DM-XXXX Series Dampers

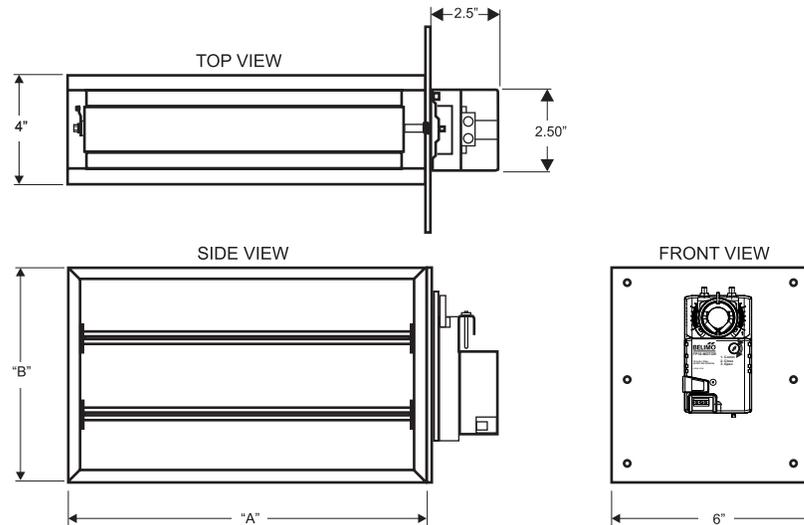

SPECIFICATIONS

DIMENSIONS:

Damper models SC-DM-XXXX are sized width (A) by height (B) with actuator on the (B) dimensions.
Bottom mount models SC-DM-XXXX-BM are sized width (A) by height (B) with actuator on the (A) dimension.
Actual (A) and (B) dimensions are undercut 1/4".
Standard sizes range from 8" x 8" up to 36" x 24" in 2" increments.

APPLICATIONS:

SC-DM-XXXX zone control dampers include a damper and two-position 24V power close/power open, 3-wire actuator and can be used with residential and commercial zone control systems. The dampers can be installed in any position and are rated for duct systems having less than 1.0" WC.


CONSTRUCTION:

- 1/16" extruded aluminum frame
- 1/16" extruded aluminum parallel blades
- 1/16" aluminum mounting flange
- Nylon bushings
- Minimum position adjustment

ELECTRICAL:

- 24 Volt, 2.5 VA, floating point
- 60 second timing
- Torque 18 in-lb

**SPECIFIED
CONTROLS**



5351 E. Thompson Road Suite 128
Indianapolis, IN 46237
www.specifiedcontrols.com
Phone: 888.359.0365