


# Submittal Sheet

JOB NAME \_\_\_\_\_  
ARCHITECT \_\_\_\_\_  
ENGINEER \_\_\_\_\_  
CONTRACTOR \_\_\_\_\_  
LOCATION \_\_\_\_\_

**SC-OAD-XX**

**EXHAUST OR  
FRESH AIR  
DAMPER**

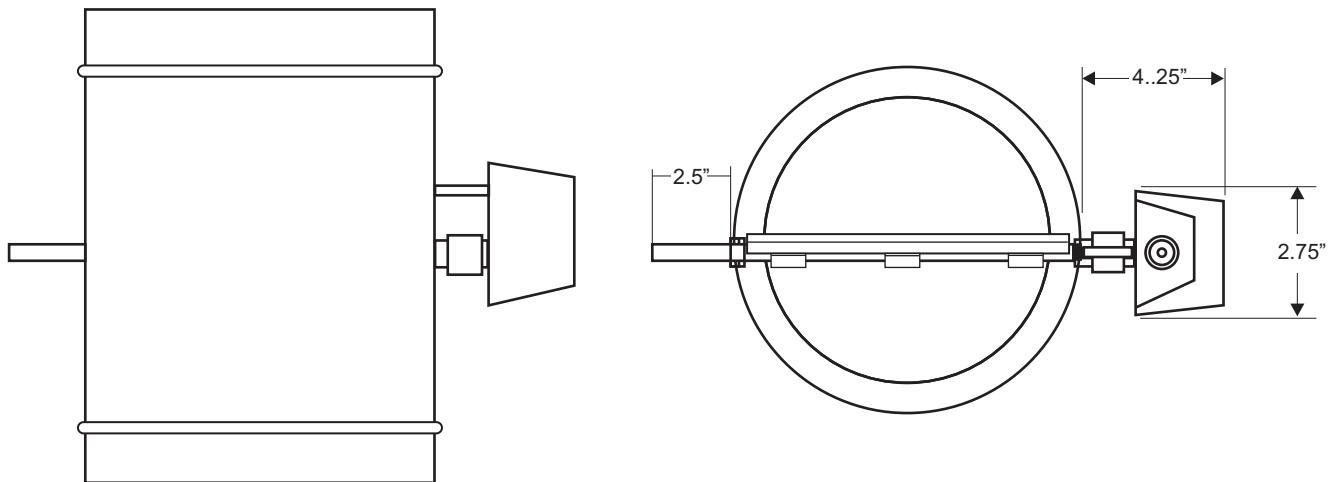

The SC-OAD-XX is designed for retrofit or new construction applications requiring exhaust, fresh air intake and on-off zone control. Typical application use includes bathrooms or restrooms in high rise hotels, office buildings and apartment buildings. The damper includes a direct coupled, spring return actuator available in 24 VAC or 110 VAC . Made in the U.S.A.

## DAMPER SPECIFICATIONS:

Available Sizes: 6", 8", 10", 12", 14", 16", 18"  
Damper Shell: 20 gauge galvanized steel  
Damper Blade: 24 gauge galvanized steel  
Shaft: 1/2" solid aluminum  
Body Length: 8"  
Gasket: Low leakage  
Bushings: Bronze Oilite  
Leakage: Class 2 - 10 cfm/ft<sup>2</sup> @ 1" w.g. (3 cmm/m<sup>2</sup> @ .25 kPa)

## ELECTRICAL

24 Volt, 10 VA, 0.43 Amp powered open, spring return closed actuator  
Can be supplied with 120 Volt actuator  
Also available in powered closed, spring return open  
Motor is impedance protected with no end switches

**SPECIFIED  
CONTROLS**



5351 E. Thompson Road Box 128  
Indianapolis, IN 46237  
[www.specifiedcontrols.com](http://www.specifiedcontrols.com)  
Phone: 888.359.0365

SC-08-1157-092324