


**SPECIFIED
CONTROLS**




Specification Sheet

Rectangular Damper Assembly

SC-SD-XXXX

Used in commercial zoning applications

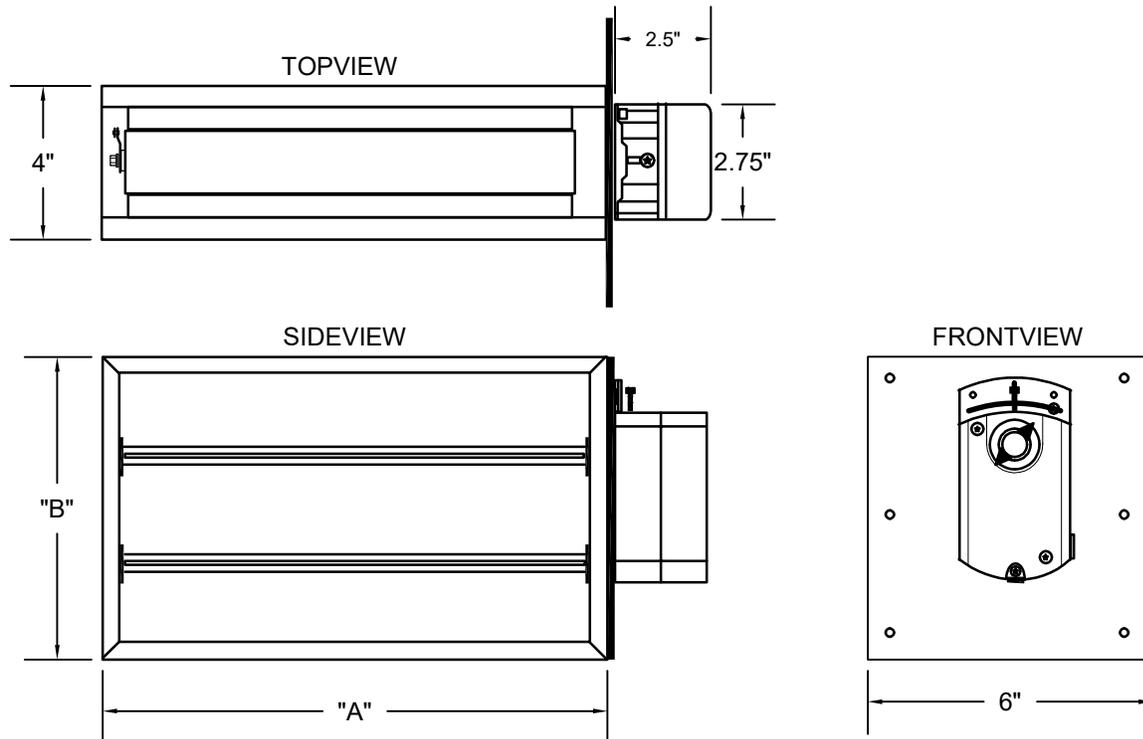

DIMENSIONS:

Damper models SC-SD-XXXX are sized width (A) by height (B) with actuator on the (B) dimension.
Bottom mount models SC-SD-XXXX-BM are sized width (A) by height (B) with actuator on the (A) dimension.
Actual (A) and (B) dimensions are undercut 1/4".
Standard sizes range from 8"x8" up to 36"x24" in 2" increments.

APPLICATION:

Compatible for zone control and other HVAC applications with static pressures less than 1.0" w.c.

CONSTRUCTION:

- 1/16" extruded aluminum frame
- 1/16" extruded aluminum parallel blades
- 1/16" aluminum mounting flange
- Nylon bushings
- Minimum position adjustment

ELECTRICAL:

- 24Volt, 2VA, floating point
- 90 second timing
- 44 lb.-in.

**SPECIFIED
CONTROLS**



5351 East Thompson Road
Suite 128
Indianapolis, IN 46237
888.359.0365
www.specifiedcontrols.com

SC-08-1104-092424