



The SC-TR75 is a 75 VA, 480/240/208/120 to 24 VAC transformer used in low voltage applications. The transformer has a circuit breaker along with foot and single threaded hub mount.

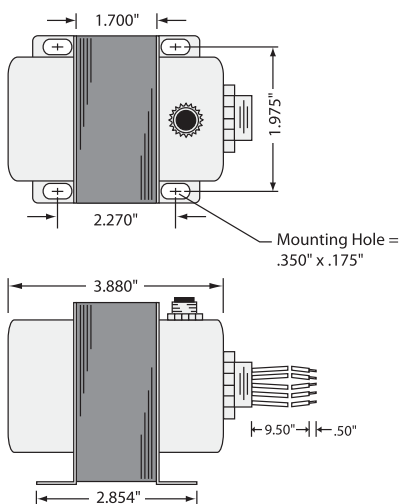

PRIMARY WIRES	SECONDARY WIRES
Gry - 480 VAC	Yel/Wht - 24 VAC
Org - 240 VAC	
Red - 208 VAC	
Wht - 120 VAC	
Blk - Comm	Yel - Comm

Secondary Yel/Wht wire in phase with Primary Blk wire.



SPECIFICATIONS

- VA Rating:** 75
- Frequency:** 50/60 Hz
- Mounting:** Foot & Single Threaded Hub
- Over Current Protection:** Circuit Breaker
- Dimensions:** 3.880" x 2.515" x 3.030" (w/ .500" NPT Hub)
- Wire Length:** 9.5" Typical w/ .5" Strip
- Operating Temperature:** -30 to 140° F
- MTBF:** 100,000 Hours @ 77° F
- Construction:** Split-Bobbin
- Weight:** 3.80 lbs.
- Approvals:** Class 2 UL5085-3 Listed, C-UL, CE, RoHS