

SPECIFICATION SHEET
SC-EZ-BD-XX Barometric Bypass Damper with Easy Adjustment Lever

Back

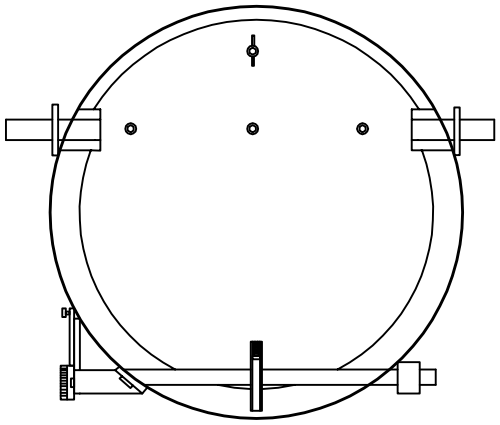

Side

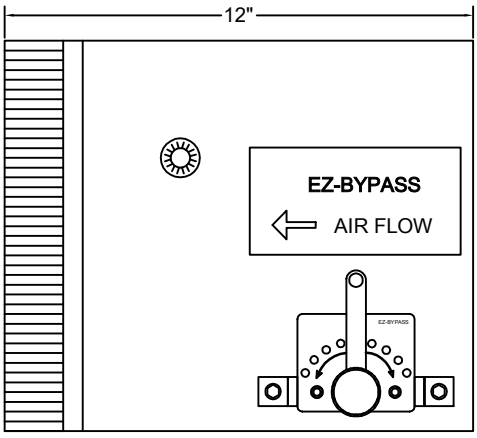

SPECIFICATIONS

DIMENSIONS:

Barometric bypass damper models SC-EZ-BD-XX are available in the following sizes: 6", 8", 10", 12", 14"

APPLICATION:

Passively maintains system static pressure in zone control and other HVAC applications. Factory-calibrated at 0.4" w.c., but can be adjusted in either direction with the turn of a lever.
Damper can be mounted horizontally or vertically in the direction of airflow.

DAMPER CONSTRUCTION:

22 gauge steel shell
20 gauge steel blade
½" and ⅜" aluminum shafts
Nylon bushings
Airtight blade seals
ABS plastic adjustment bracket and pulley mechanism

RECOMMENDED SIZING BASED ON COOLING TONNAGE:

1.5 Tons = 6"
2.5 Tons = 8"
3 Tons = 10"
4-5 Tons = 12"
7.5 Tons = 14"

SPECIFIED CONTROLS

5351 East Thompson Road
Suite 128
Indianapolis, IN 46237
888.359.0365
www.specifiedcontrols.com