


# Submittal Sheet

JOB NAME \_\_\_\_\_  
ARCHITECT \_\_\_\_\_  
ENGINEER \_\_\_\_\_  
CONTRACTOR \_\_\_\_\_  
LOCATION \_\_\_\_\_

## SC-BH-XX Series Dampers

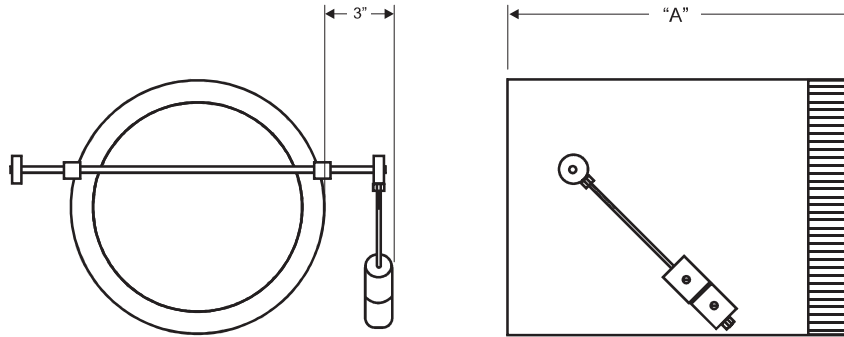

FOR HORIZONTAL MOUNTING ONLY

DAMPER SIZE	"A" DIMENSION
8"	10"
10"	10"
12"	13"
14"	14"
16"	14"

### SPECIFICATIONS

#### DIMENSIONS:

Barometric bypass damper models BH-XX are available in standard sizes from 7" to 16"

#### APPLICATION:

Compatible for zone control and other HVAC applications in maintaining system static pressure from 0.2" to 0.75" w.c.

#### CONSTRUCTION:

22 gauge steel shell  
20 gauge steel blade  
1/2" aluminum shaft  
Nylon bushings  
Air tight blade seals  
Adjustable weights

#### RECOMMENDED BYPASS DAMPER SIZING BASED ON COOLING TONNAGE:

2.5 Tons and less = 8"  
3 Tons = 10"  
4 to 5 Tons = 12"  
7.5 Tons = 14"  
10 Tons = 16"

**SPECIFIED  
CONTROLS**

5351 E. Thompson Road Suite 128  
Indianapolis, IN 46237  
[www.specifiedcontrols.com](http://www.specifiedcontrols.com)  
Phone: 317.361.0830