


SC-Z20 ZONE CONTROL SC-ZD-XXXX SERIES ZONE CONTROL DAMPER SPECIFICATIONS

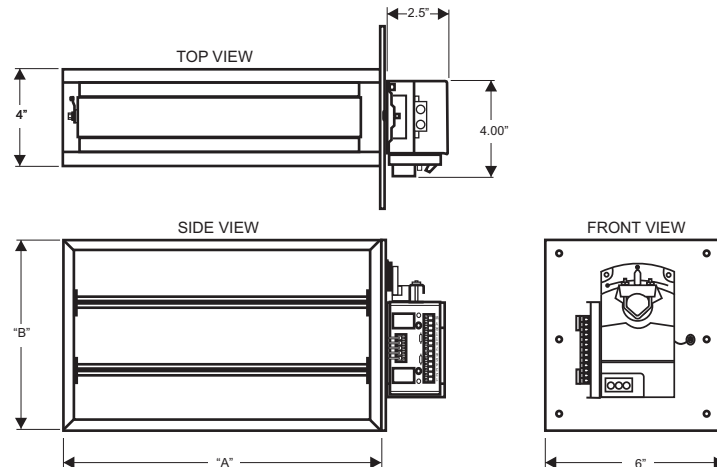

APPLICATION:

The model ZD-XXXX is a rectangular commercial zone control damper assembly that includes a damper, modulating actuator, duct temperature sensor, and actuator control board. The SC-ZD-XXXX zone damper is used with a SC-Z20-T, P+I zone thermostat.

AVAILABLE SIZES:

Side mount models are sized width (A) by height (B) with actuator on the (B) dimension.
Bottom mount models are sized width (A) by height (B) with actuator on the (A) dimension.
(A) and (B) dimensions are undercut 1/4".
Standard sizes range from 8" x 8" up to 36" x 24" in 2" increments.

CONSTRUCTION:

Frame:	1/16" extruded aluminum
Blades:	1/16" extruded aluminum (parallel design)
Flange:	1/16" aluminum
Shaft:	1/2" aluminum
Bushings:	Nylon

AIR FLOW & PRESSURE:

Max static pressure:	2 inches w.c.
Max velocity:	2,000 fpm
CFM:	0 - 4000 cfm

DAMPER ACTUATOR:

24 vac, 2va, 3-wire floating
point actuator

OPERATION:

Continually regulates supply air
volume in response to SC-Z20-T
thermostat control

COMPONENTS:

Damper, actuator, PC board
and discharge air sensor

AIR HANDLER:

Space thermostat
Discharge air controller

WARRANTY:

5 Years

Drawings are intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale.
Specified Controls reserves the right to make product changes without notification or obligation.